


Solid End Mills

HARDMILL



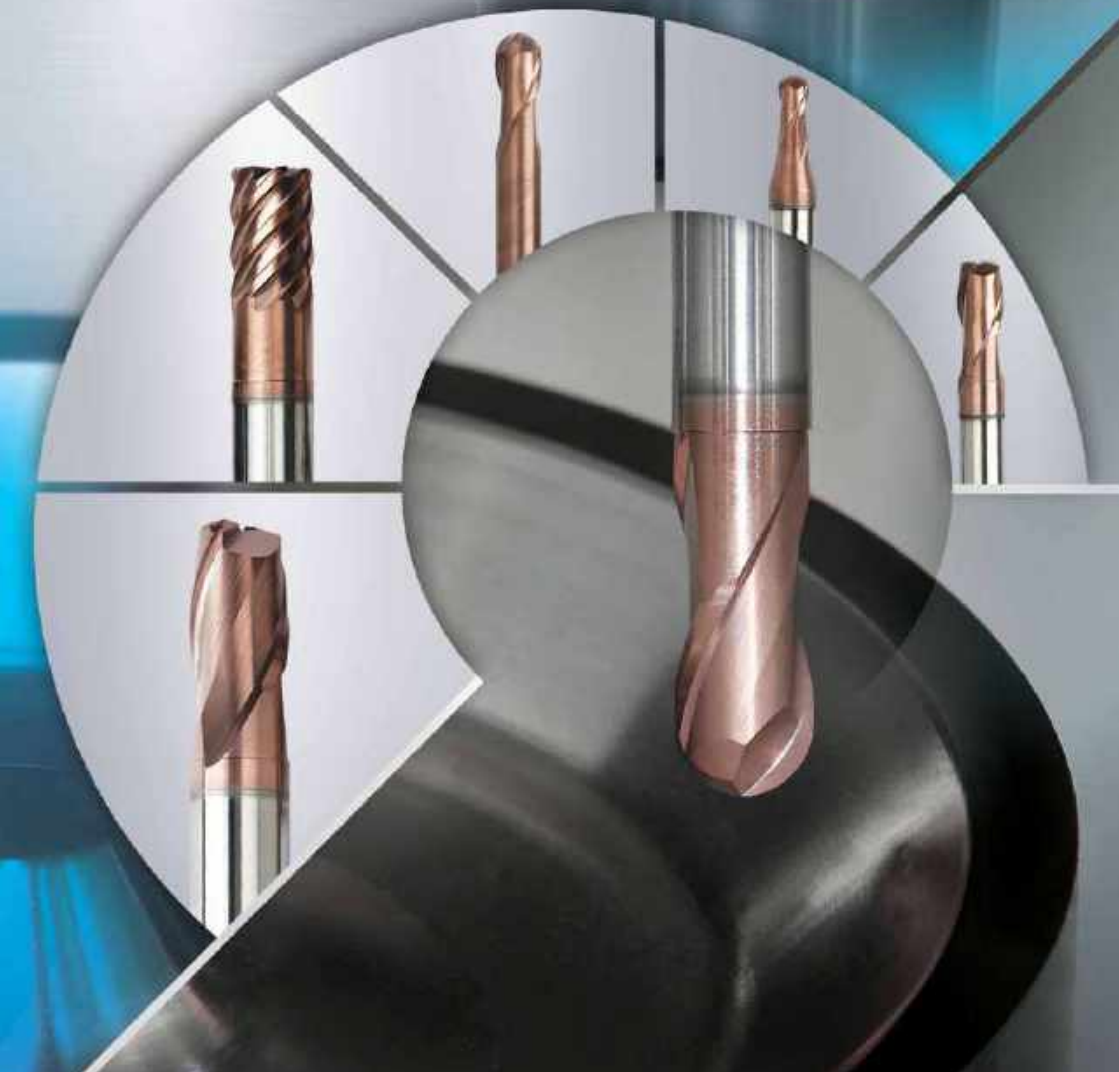

High Speed

Machining on high-hardness materials (~HRc70)

1000 Standard items

Covering a wide range of applications Flat, Radius & Ball nose in various neck lengths

Precision

High accurate end mills
R : $\pm 5\mu\text{m}$, \varnothing : 0~10 μm (D \leq 6mm)









TT5505









Ultra fine substrate with PVD coating grade for hardness & temperature resistant material



Tool Selection Guide

Solid end mill

Series	HSB 2			HSB 4																																																
	HSB 2	HSB 2...S6	HSB 2...S/M	HSB 4...M																																																
	 5 → 8	 9 →	 10 → 11	 12 →																																																
Type	Ball	Ball	Ball	Ball																																																
Flute																																																				
Length	Long neck	Long neck	Short/Medium	Medium																																																
Grades	TT5505	TT5505	TT5505	TT5505																																																
Application	* H.S.M	* H.S.M	* H.S.M	* H.S.M																																																
Material	<table border="1"><tr><td>P</td><td>M</td><td>K</td><td>N</td><td>S</td><td>H</td></tr><tr><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>●</td></tr></table>	P	M	K	N	S	H	○	○	○	○	○	●	<table border="1"><tr><td>P</td><td>M</td><td>K</td><td>N</td><td>S</td><td>H</td></tr><tr><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>●</td></tr></table>	P	M	K	N	S	H	○	○	○	○	○	●	<table border="1"><tr><td>P</td><td>M</td><td>K</td><td>N</td><td>S</td><td>H</td></tr><tr><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>●</td></tr></table>	P	M	K	N	S	H	○	○	○	○	○	●	<table border="1"><tr><td>P</td><td>M</td><td>K</td><td>N</td><td>S</td><td>H</td></tr><tr><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>●</td></tr></table>	P	M	K	N	S	H	○	○	○	○	○	●
P	M	K	N	S	H																																															
○	○	○	○	○	●																																															
P	M	K	N	S	H																																															
○	○	○	○	○	●																																															
P	M	K	N	S	H																																															
○	○	○	○	○	●																																															
P	M	K	N	S	H																																															
○	○	○	○	○	●																																															
Range	Ø0.3 - Ø12.0	Ø0.6 - Ø2.0	Ø0.3 - Ø12.0	Ø4.0 - Ø12.0																																																









Series	HSF 2		HSF 4																																																	
	HSF 2	HSF 2...M	HSF 4	HSF 4...M																																																
	 13 → 16	 17 → 18	 19 → 20	 21 →																																																
Type	Flat	Flat	Flat	Flat																																																
Flute																																																				
Length	Long neck	Medium	Long neck	Medium																																																
Grades	TT5505	TT5505	TT5505	TT5505																																																
Application	* H.S.M	* H.S.M	* H.S.M	* H.S.M																																																
Material	<table border="1"><tr><td>P</td><td>M</td><td>K</td><td>N</td><td>S</td><td>H</td></tr><tr><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>●</td></tr></table>	P	M	K	N	S	H	○	○	○	○	○	●	<table border="1"><tr><td>P</td><td>M</td><td>K</td><td>N</td><td>S</td><td>H</td></tr><tr><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>●</td></tr></table>	P	M	K	N	S	H	○	○	○	○	○	●	<table border="1"><tr><td>P</td><td>M</td><td>K</td><td>N</td><td>S</td><td>H</td></tr><tr><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>●</td></tr></table>	P	M	K	N	S	H	○	○	○	○	○	●	<table border="1"><tr><td>P</td><td>M</td><td>K</td><td>N</td><td>S</td><td>H</td></tr><tr><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>●</td></tr></table>	P	M	K	N	S	H	○	○	○	○	○	●
P	M	K	N	S	H																																															
○	○	○	○	○	●																																															
P	M	K	N	S	H																																															
○	○	○	○	○	●																																															
P	M	K	N	S	H																																															
○	○	○	○	○	●																																															
P	M	K	N	S	H																																															
○	○	○	○	○	●																																															
Range	Ø0.3 - Ø12.0	Ø0.3 - Ø12.0	Ø1.0 - Ø12.0	Ø1.0 - Ø12.0																																																









• H.S.M : High Speed Machining

● Recommended, ○ Suitable

Tool Selection Guide

Solid end mill

Series	HSF 6		HSR 2																																																	
	HSF 6...M	HSF 6...XLT	HSR 2	HSR 2...M																																																
																																																				
	22→	22→	23→ 29	30→ 32																																																
Type	Flat	Flat	Radius	Radius																																																
Flute																																																				
Length	Medium	Extra long	Long neck	Medium																																																
Grades	TT5505	TT5505	TT5505	TT5505																																																
Application	Finishing	Finishing	* H.S.M	* H.S.M																																																
Material	<table border="1"><tr><td>P</td><td>M</td><td>K</td><td>N</td><td>S</td><td>H</td></tr><tr><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>●</td></tr></table>	P	M	K	N	S	H	○	○	○	○	○	●	<table border="1"><tr><td>P</td><td>M</td><td>K</td><td>N</td><td>S</td><td>H</td></tr><tr><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>●</td></tr></table>	P	M	K	N	S	H	○	○	○	○	○	●	<table border="1"><tr><td>P</td><td>M</td><td>K</td><td>N</td><td>S</td><td>H</td></tr><tr><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>●</td></tr></table>	P	M	K	N	S	H	○	○	○	○	○	●	<table border="1"><tr><td>P</td><td>M</td><td>K</td><td>N</td><td>S</td><td>H</td></tr><tr><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>●</td></tr></table>	P	M	K	N	S	H	○	○	○	○	○	●
P	M	K	N	S	H																																															
○	○	○	○	○	●																																															
P	M	K	N	S	H																																															
○	○	○	○	○	●																																															
P	M	K	N	S	H																																															
○	○	○	○	○	●																																															
P	M	K	N	S	H																																															
○	○	○	○	○	●																																															
Range	Ø3.0 - Ø12.0	Ø5.0 - Ø12.0	Ø0.3 - Ø12.0	Ø0.3 - Ø12.0																																																


Series	HSR 4		HSR 6																																																	
	HSR 4	HSR 4...M	HSR 6	HSR 6...M																																																
																																																				
	33→ 36	37→ 38	39→	39→																																																
Type	Radius	Radius	Radius	Radius																																																
Flute																																																				
Length	Long neck	Medium	Long neck	Medium																																																
Grades	TT5505	TT5505	TT5505	TT5505																																																
Application	* H.S.M	* H.S.M	Finishing	Finishing																																																
Material	<table border="1"><tr><td>P</td><td>M</td><td>K</td><td>N</td><td>S</td><td>H</td></tr><tr><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>●</td></tr></table>	P	M	K	N	S	H	○	○	○	○	○	●	<table border="1"><tr><td>P</td><td>M</td><td>K</td><td>N</td><td>S</td><td>H</td></tr><tr><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>●</td></tr></table>	P	M	K	N	S	H	○	○	○	○	○	●	<table border="1"><tr><td>P</td><td>M</td><td>K</td><td>N</td><td>S</td><td>H</td></tr><tr><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>●</td></tr></table>	P	M	K	N	S	H	○	○	○	○	○	●	<table border="1"><tr><td>P</td><td>M</td><td>K</td><td>N</td><td>S</td><td>H</td></tr><tr><td>○</td><td>○</td><td>○</td><td>○</td><td>○</td><td>●</td></tr></table>	P	M	K	N	S	H	○	○	○	○	○	●
P	M	K	N	S	H																																															
○	○	○	○	○	●																																															
P	M	K	N	S	H																																															
○	○	○	○	○	●																																															
P	M	K	N	S	H																																															
○	○	○	○	○	●																																															
P	M	K	N	S	H																																															
○	○	○	○	○	●																																															
Range	Ø1.0 - Ø12.0	Ø1.0 - Ø12.0	Ø6.0 - Ø12.0	Ø6.0 - Ø12.0																																																

• *H.S.M : High Speed Machining

● Recommended, ○ Suitable

HSB 2

2 flute long neck ball

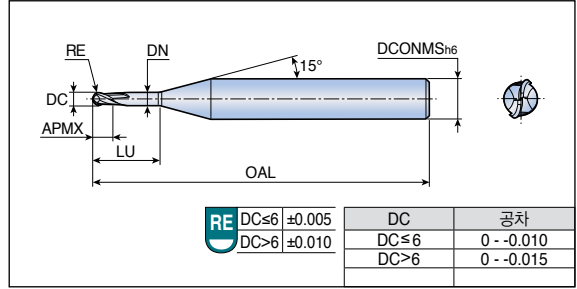


규격	치수 (mm)							재종 TT5505
	DC	RE	OAL	APMX	LU	DN	DCONMS	
HSB 2003 003 010	0.3	0.15	45	0.3	1.0	0.27	4.0	●
2003 003 020	0.3	0.15	45	0.3	2.0	0.27	4.0	●
2003 003 030	0.3	0.15	45	0.3	3.0	0.27	4.0	●
2004 004 010	0.4	0.2	45	0.4	1.0	0.36	4.0	●
2004 004 015	0.4	0.2	45	0.4	1.5	0.36	4.0	●
2004 004 020	0.4	0.2	45	0.4	2.0	0.36	4.0	●
2004 004 025	0.4	0.2	45	0.4	2.5	0.36	4.0	●
2004 004 030	0.4	0.2	45	0.4	3.0	0.36	4.0	●
2004 004 040	0.4	0.2	45	0.4	4.0	0.36	4.0	●
2005 005 010	0.5	0.25	45	0.5	1.0	0.45	4.0	●
2005 005 015	0.5	0.25	45	0.5	1.5	0.45	4.0	●
2005 005 020	0.5	0.25	45	0.5	2.0	0.45	4.0	●
2005 005 025	0.5	0.25	45	0.5	2.5	0.45	4.0	●
2005 005 030	0.5	0.25	45	0.5	3.0	0.45	4.0	●
2005 005 040	0.5	0.25	45	0.5	4.0	0.45	4.0	●
2005 005 050	0.5	0.25	45	0.5	5.0	0.45	4.0	●
2005 005 060	0.5	0.25	45	0.5	6.0	0.45	4.0	●
2005 005 080	0.5	0.25	45	0.5	8.0	0.45	4.0	●
2006 006 020	0.6	0.3	45	0.6	2.0	0.55	4.0	●
2006 006 030	0.6	0.3	45	0.6	3.0	0.55	4.0	●
2006 006 040	0.6	0.3	45	0.6	4.0	0.55	4.0	●
2006 006 050	0.6	0.3	45	0.6	5.0	0.55	4.0	●
2006 006 060	0.6	0.3	45	0.6	6.0	0.55	4.0	●
2006 006 080	0.6	0.3	45	0.6	8.0	0.55	4.0	●
2006 006 100	0.6	0.3	45	0.6	10.0	0.55	4.0	●
2008 008 020	0.8	0.4	45	0.8	2.0	0.75	4.0	●
2008 008 030	0.8	0.4	45	0.8	3.0	0.75	4.0	●
2008 008 040	0.8	0.4	45	0.8	4.0	0.75	4.0	●
2008 008 050	0.8	0.4	45	0.8	5.0	0.75	4.0	●
2008 008 060	0.8	0.4	45	0.8	6.0	0.75	4.0	●
2008 008 080	0.8	0.4	45	0.8	8.0	0.75	4.0	●
2008 008 100	0.8	0.4	45	0.8	10.0	0.75	4.0	●
2008 008 120	0.8	0.4	45	0.8	12.0	0.75	4.0	●

● Standard items

HSB 2

2 flute long neck ball

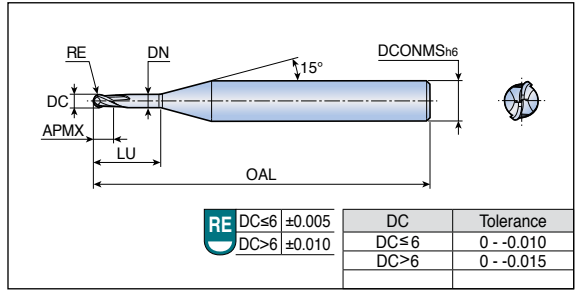



Designation	Dimension (mm)							Grade
	DC	RE	OAL	APMX	LU	DN	DCONMS	
HSB 2010 010 030	1.0	0.5	50	1.0	3	0.97	4.0	●
2010 010 040	1.0	0.5	50	1.0	4	0.97	4.0	●
2010 010 050	1.0	0.5	50	1.0	5	0.97	4.0	●
2010 010 060	1.0	0.5	50	1.0	6	0.97	4.0	●
2010 010 070	1.0	0.5	50	1.0	7	0.97	4.0	●
2010 010 080	1.0	0.5	50	1.0	8	0.95	4.0	●
2010 010 090	1.0	0.5	50	1.0	9	0.95	4.0	●
2010 010 100	1.0	0.5	50	1.0	10	0.95	4.0	●
2010 010 120	1.0	0.5	50	1.0	12	0.93	4.0	●
2010 010 140	1.0	0.5	50	1.0	14	0.93	4.0	●
2010 010 160	1.0	0.5	50	1.0	16	0.93	4.0	●
2010 010 180	1.0	0.5	55	1.0	18	0.93	4.0	●
2010 010 200	1.0	0.5	55	1.0	20	0.93	4.0	●
2012 012 040	1.2	0.6	50	1.2	4	1.15	4.0	●
2012 012 060	1.2	0.6	50	1.2	6	1.15	4.0	●
2012 012 080	1.2	0.6	50	1.2	8	1.15	4.0	●
2012 012 100	1.2	0.6	50	1.2	10	1.15	4.0	●
2012 012 120	1.2	0.6	50	1.2	12	1.13	4.0	●
2015 015 040	1.5	0.75	50	1.5	4	1.45	4.0	●
2015 015 060	1.5	0.75	50	1.5	6	1.45	4.0	●
2015 015 080	1.5	0.75	50	1.5	8	1.45	4.0	●
2015 015 100	1.5	0.75	50	1.5	10	1.45	4.0	●
2015 015 120	1.5	0.75	50	1.5	12	1.43	4.0	●
2015 015 140	1.5	0.75	50	1.5	14	1.43	4.0	●
2015 015 160	1.5	0.75	50	1.5	16	1.41	4.0	●
2015 015 180	1.5	0.75	55	1.5	18	1.41	4.0	●
2015 015 200	1.5	0.75	55	1.5	20	1.39	4.0	●
2020 030 060	2.0	1.0	50	3.0	6	1.95	4.0	●
2020 030 080	2.0	1.0	50	3.0	8	1.95	4.0	●
2020 030 100	2.0	1.0	50	3.0	10	1.95	4.0	●
2020 030 120	2.0	1.0	50	3.0	12	1.93	4.0	●
2020 030 140	2.0	1.0	50	3.0	14	1.93	4.0	●
2020 030 160	2.0	1.0	50	3.0	16	1.93	4.0	●
2020 030 180	2.0	1.0	55	3.0	18	1.93	4.0	●
2020 030 200	2.0	1.0	55	3.0	20	1.93	4.0	●

●: Standard items

HARDMILL • RHINOSOLID

HSF 2

2 flute long neck flat


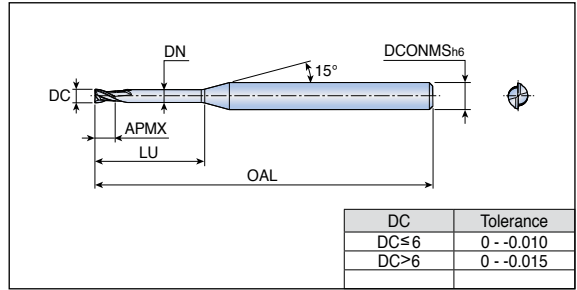


Designation	Feed (mm/tooth)	Dimension (mm)						Grade TT5505
		DC	OAL	APMX	LU	DN	DCONMS	
HSF 2003 004 010	0.006-0.010	0.3	45	0.4	1.0	0.27	4.0	●
2003 004 015	0.006-0.010	0.3	45	0.4	1.5	0.27	4.0	●
2003 004 020	0.006-0.010	0.3	45	0.4	2.0	0.27	4.0	●
2003 004 025	0.006-0.010	0.3	45	0.4	2.5	0.27	4.0	●
2003 004 030	0.006-0.010	0.3	45	0.4	3.0	0.27	4.0	●
2003 004 040	0.005-0.008	0.3	45	0.4	4.0	0.27	4.0	●
2003 004 050	0.005-0.008	0.3	45	0.4	5.0	0.27	4.0	●
2004 006 010	0.006-0.010	0.4	45	0.6	1.0	0.37	4.0	●
2004 006 015	0.006-0.010	0.4	45	0.6	1.5	0.37	4.0	●
2004 006 020	0.006-0.010	0.4	45	0.6	2.0	0.37	4.0	●
2004 006 025	0.006-0.010	0.4	45	0.6	2.5	0.37	4.0	●
2004 006 030	0.006-0.010	0.4	45	0.6	3.0	0.37	4.0	●
2004 006 040	0.006-0.010	0.4	45	0.6	4.0	0.37	4.0	●
2004 006 050	0.005-0.008	0.4	45	0.6	5.0	0.37	4.0	●
2004 006 060	0.005-0.008	0.4	45	0.6	6.0	0.37	4.0	●
2005 007 010	0.006-0.010	0.5	45	0.7	1.0	0.45	4.0	●
2005 007 015	0.006-0.010	0.5	45	0.7	1.5	0.45	4.0	●
2005 007 020	0.006-0.010	0.5	45	0.7	2.0	0.45	4.0	●
2005 007 025	0.006-0.009	0.5	45	0.7	2.5	0.45	4.0	●
2005 007 030	0.006-0.009	0.5	45	0.7	3.0	0.45	4.0	●
2005 007 040	0.006-0.008	0.5	45	0.7	4.0	0.45	4.0	●
2005 007 050	0.006-0.008	0.5	45	0.7	5.0	0.45	4.0	●
2005 007 060	0.005-0.007	0.5	45	0.7	6.0	0.45	4.0	●
2005 007 080	0.005-0.007	0.5	45	0.7	8.0	0.45	4.0	●
2006 009 020	0.008-0.013	0.6	45	0.9	2.0	0.55	4.0	●
2006 009 030	0.008-0.013	0.6	45	0.9	3.0	0.55	4.0	●
2006 009 040	0.008-0.013	0.6	45	0.9	4.0	0.55	4.0	●
2006 009 050	0.008-0.013	0.6	45	0.9	5.0	0.55	4.0	●
2006 009 060	0.008-0.013	0.6	45	0.9	6.0	0.55	4.0	●
2006 009 080	0.006-0.010	0.6	45	0.9	8.0	0.55	4.0	●
2006 009 100	0.006-0.010	0.6	45	0.9	10.0	0.55	4.0	●
2007 012 020	0.008-0.013	0.7	45	1.2	2.0	0.65	4.0	●
2007 012 040	0.008-0.013	0.7	45	1.2	4.0	0.65	4.0	●
2007 012 060	0.008-0.013	0.7	45	1.2	6.0	0.65	4.0	●
2007 012 080	0.008-0.013	0.7	45	1.2	8.0	0.65	4.0	●
2007 012 100	0.006-0.010	0.7	45	1.2	10.0	0.65	4.0	●

● Standard items

HSF 2

2 flute long neck flat

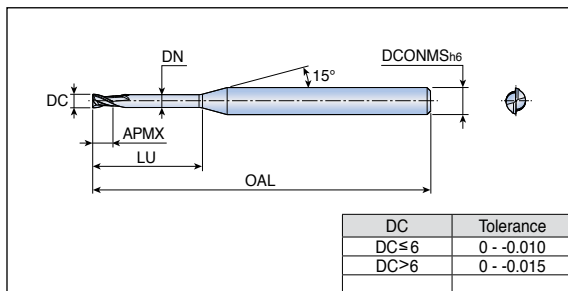


Designation	Feed (mm/tooth)	Dimension (mm)						Grade
		DC	OAL	APMX	LU	DN	DCONMS	
HSF 2007 012 120	0.006-0.010	0.7	45	1.2	12.0	0.65	4.0	●
2008 012 020	0.007-0.015	0.8	45	1.2	2.0	0.75	4.0	●
2008 012 030	0.007-0.015	0.8	45	1.2	3.0	0.75	4.0	●
2008 012 040	0.007-0.015	0.8	45	1.2	4.0	0.75	4.0	●
2008 012 050	0.007-0.015	0.8	45	1.2	5.0	0.75	4.0	●
2008 012 060	0.007-0.015	0.8	45	1.2	6.0	0.75	4.0	●
2008 012 080	0.007-0.013	0.8	45	1.2	8.0	0.73	4.0	●
2008 012 100	0.007-0.012	0.8	45	1.2	10.0	0.73	4.0	●
2008 012 120	0.007-0.012	0.8	45	1.2	12.0	0.73	4.0	●
2010 015 030	0.009-0.020	1.0	50	1.5	3.0	0.97	4.0	●
2010 015 040	0.009-0.020	1.0	50	1.5	4.0	0.97	4.0	●
2010 015 050	0.009-0.018	1.0	50	1.5	5.0	0.97	4.0	●
2010 015 060	0.009-0.018	1.0	50	1.5	6.0	0.97	4.0	●
2010 015 070	0.009-0.018	1.0	50	1.5	7.0	0.97	4.0	●
2010 015 080	0.009-0.018	1.0	50	1.5	8.0	0.95	4.0	●
2010 015 100	0.009-0.016	1.0	50	1.5	10.0	0.95	4.0	●
2010 015 120	0.008-0.014	1.0	50	1.5	12.0	0.93	4.0	●
2010 015 140	0.008-0.014	1.0	50	1.5	14.0	0.93	4.0	●
2010 015 160	0.008-0.014	1.0	50	1.5	16.0	0.91	4.0	●
2010 015 180	0.008-0.012	1.0	55	1.5	18.0	0.91	4.0	●
2010 015 200	0.008-0.012	1.0	55	1.5	20.0	0.85	4.0	●
2012 018 040	0.010-0.020	1.2	50	1.8	4.0	1.17	4.0	●
2012 018 060	0.010-0.020	1.2	50	1.8	6.0	1.17	4.0	●
2012 018 080	0.010-0.020	1.2	50	1.8	8.0	1.15	4.0	●
2012 018 100	0.010-0.019	1.2	50	1.8	10.0	1.15	4.0	●
2012 018 120	0.010-0.018	1.2	50	1.8	12.0	1.15	4.0	●
2012 018 160	0.010-0.018	1.2	50	1.8	16.0	1.13	4.0	●
2015 023 040	0.015-0.025	1.5	50	2.3	4.0	1.47	4.0	●
2015 023 060	0.015-0.025	1.5	50	2.3	6.0	1.47	4.0	●
2015 023 080	0.015-0.025	1.5	50	2.3	8.0	1.45	4.0	●
2015 023 100	0.015-0.025	1.5	50	2.3	10.0	1.45	4.0	●
2015 023 120	0.013-0.025	1.5	50	2.3	12.0	1.43	4.0	●
2015 023 140	0.013-0.025	1.5	50	2.3	14.0	1.43	4.0	●
2015 023 160	0.011-0.015	1.5	50	2.3	16.0	1.41	4.0	●
2015 023 180	0.011-0.015	1.5	55	2.3	18.0	1.41	4.0	●
2015 023 200	0.011-0.015	1.5	55	2.3	20.0	1.41	4.0	●

●: Standard items

HSF 2

2 flute long neck flat


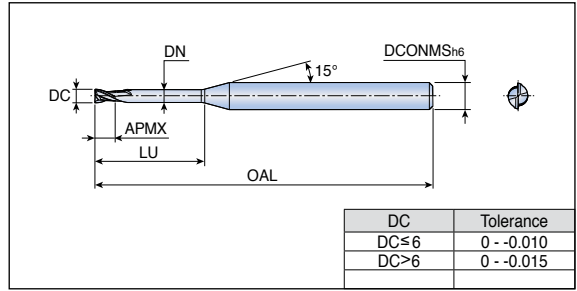


Designation	Feed (mm/tooth)	Dimension (mm)						Grade TT5505
		DC	OAL	APMX	LU	DN	DCONMS	
HSF 2020 030 040	0.018-0.040	2.0	50	3.0	4	1.95	4.0	●
2020 030 060	0.018-0.040	2.0	50	3.0	6	1.95	4.0	●
2020 030 080	0.018-0.040	2.0	50	3.0	8	1.95	4.0	●
2020 030 100	0.018-0.040	2.0	50	3.0	10	1.95	4.0	●
2020 030 120	0.016-0.025	2.0	50	3.0	12	1.93	4.0	●
2020 030 140	0.016-0.025	2.0	50	3.0	14	1.93	4.0	●
2020 030 160	0.015-0.022	2.0	50	3.0	16	1.91	4.0	●
2020 030 180	0.015-0.022	2.0	55	3.0	18	1.91	4.0	●
2020 030 200	0.013-0.019	2.0	55	3.0	20	1.91	4.0	●
2020 030 250	0.013-0.019	2.0	60	3.0	25	1.91	4.0	●
2020 030 300	0.010-0.015	2.0	70	3.0	30	1.91	4.0	●
2025 040 080	0.019-0.045	2.5	50	4.0	8	2.4	4.0	●
2025 040 100	0.019-0.045	2.5	50	4.0	10	2.4	4.0	●
2025 040 120	0.017-0.040	2.5	50	4.0	12	2.4	4.0	●
2025 040 160	0.015-0.030	2.5	50	4.0	16	2.4	4.0	●
2025 040 200	0.013-0.020	2.5	55	4.0	20	2.4	4.0	●
2030 045 080	0.021-0.060	3.0	55	4.5	8	2.85	6.0	●
2030 045 100	0.021-0.060	3.0	55	4.5	10	2.85	6.0	●
2030 045 120	0.018-0.050	3.0	55	4.5	12	2.85	6.0	●
2030 045 140	0.018-0.045	3.0	55	4.5	14	2.85	6.0	●
2030 045 160	0.018-0.045	3.0	55	4.5	16	2.85	6.0	●
2030 045 180	0.015-0.040	3.0	60	4.5	18	2.85	6.0	●
2030 045 200	0.015-0.040	3.0	60	4.5	20	2.85	6.0	●
2030 045 250	0.015-0.040	3.0	60	4.5	25	2.85	6.0	●
2030 045 300	0.015-0.038	3.0	70	4.5	30	2.85	6.0	●
2030 045 350	0.015-0.038	3.0	75	4.5	35	2.85	6.0	●
2030 045 400	0.015-0.030	3.0	80	4.5	40	2.85	6.0	●
2040 060 100	0.030-0.075	4.0	55	6.0	10	3.9	6.0	●
2040 060 120	0.030-0.075	4.0	55	6.0	12	3.9	6.0	●
2040 060 160	0.030-0.075	4.0	55	6.0	16	3.9	6.0	●
2040 060 200	0.030-0.070	4.0	60	6.0	20	3.9	6.0	●
2040 060 250	0.030-0.070	4.0	60	6.0	25	3.9	6.0	●
2040 060 300	0.030-0.070	4.0	70	6.0	30	3.9	6.0	●
2040 060 350	0.030-0.068	4.0	75	6.0	35	3.9	6.0	●
2040 060 400	0.030-0.068	4.0	80	6.0	40	3.9	6.0	●

● Standard items

HSF 4...M

4 flute medium flat

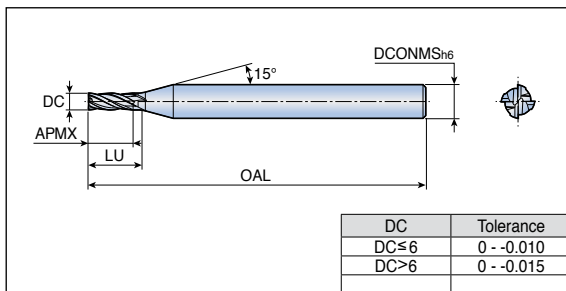


Designation	Feed (mm/tooth)	Dimension (mm)					Grade
		DC	OAL	APMX	LU	DCONMS	
HSF 4010M 025	0.009-0.020	1.0	50	2.5	3	6.0	●
4012M 030	0.010-0.020	1.2	50	3.0	4	6.0	●
4015M 040	0.015-0.025	1.5	50	4.0	5	6.0	●
4020M 060	0.018-0.040	2.0	50	6.0	7	6.0	●
4025M 070	0.019-0.045	2.5	50	7.0	8.5	6.0	●
4030M 080	0.021-0.060	3.0	60	8.0	9.5	6.0	●
4035M 090	0.026-0.068	3.5	60	9.0	11	6.0	●
4040M 100	0.030-0.075	4.0	60	10.0	12	6.0	●
4050M 130	0.056-0.090	5.0	60	13.0	15.5	6.0	●
4070M 180	0.079-0.110	7.0	65	18.0	22	8.0	●
4090M 220	0.104-0.125	9.0	70	22.0	25	10.0	●
4110M 280	0.122-0.149	11.0	80	28.0	33	12.0	●

● Standard items

HSF 4...M

4 flute medium flat

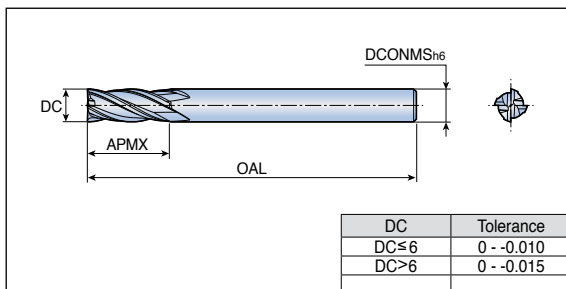

Designation	Feed (mm/tooth)	Dimension (mm)				Grade
		DC	OAL	APMX	DCONMS	
HSF 4060M 150	0.067-0.100	6.0	60	15.0	6.0	●
4080M 200	0.090-0.120	8.0	65	20.0	8.0	●
4100M 250	0.117-0.130	10.0	70	25.0	10.0	●
4120M 300	0.126-0.168	12.0	80	30.0	12.0	●


● Standard items

HSF 6...M

6 flute medium flat



• Finishing

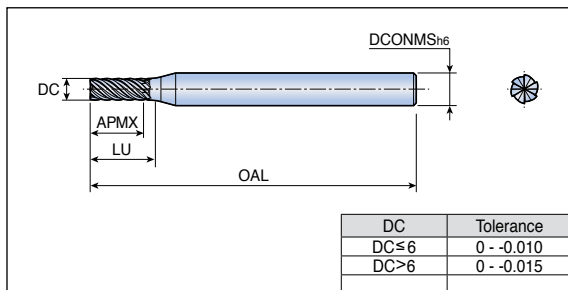

Designation	Feed (mm/tooth)	Dimension (mm)					Grade TT5505
		DC	OAL	APMX	LU	DCONMS	
HSF 6030M 080	0.010-0.030	3.0	50	8	10	6.0	●
6040M 100	0.010-0.050	4.0	60	10	12	6.0	●
6050M 150	0.020-0.050	5.0	60	15	17	6.0	●
6060M 150	0.038-0.050	6.0	60	15	-	6.0	●
6080M 200	0.045-0.060	8.0	65	20	-	8.0	●
6100M 220	0.045-0.060	10.0	70	22	-	10.0	●
6120M 260	0.053-0.070	12.0	80	26	-	12.0	●


●: Standard items

HSF 6...XLT

6 flute extra long flat



• Finishing

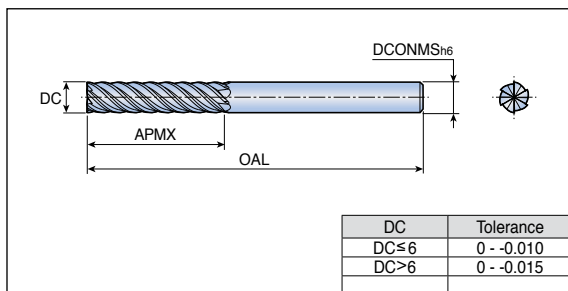


Designation	Feed (mm/tooth)	Dimension (mm)				Grade TT5505
		DC	OAL	APMX	DCONMS	
HSF 6050XLT 250	0.03-0.05	5.0	80	25	6.0	●
6060XLT 250	0.03-0.05	6.0	80	25	6.0	●
6080XLT 350	0.04-0.06	8.0	90	35	8.0	●
6100XLT 450	0.04-0.06	10.0	100	45	10.0	●
6120XLT 550	0.05-0.07	12.0	110	55	12.0	●

●: Standard items

HSR 2

2 flute long neck corner radius

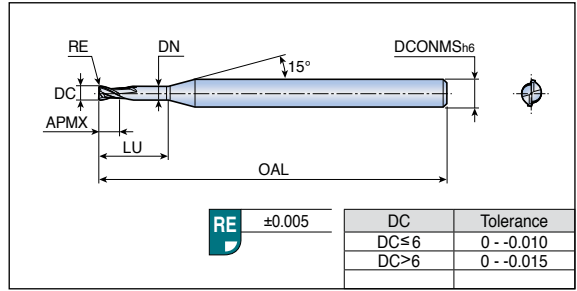


Designation	Feed (mm/tooth)	Dimension (mm)							Grade
		DC	RE	OAL	APMX	LU	DN	DCONMS	
HSR 2003 005 010	0.006-0.010	0.3	0.05	45	0.4	1.0	0.27	4.0	●
2003 005 020	0.006-0.010	0.3	0.05	45	0.4	2.0	0.27	4.0	●
2003 005 030	0.006-0.010	0.3	0.05	45	0.4	3.0	0.27	4.0	●
2004 005 010	0.006-0.010	0.4	0.05	45	0.6	1.0	0.37	4.0	●
2004 005 015	0.006-0.010	0.4	0.05	45	0.6	1.5	0.37	4.0	●
2004 005 025	0.006-0.010	0.4	0.05	45	0.6	2.5	0.37	4.0	●
2004 005 030	0.006-0.010	0.4	0.05	45	0.6	3.0	0.37	4.0	●
2004 005 040	0.006-0.010	0.4	0.05	45	0.6	4.0	0.37	4.0	●
2005 005 010	0.006-0.010	0.5	0.05	45	0.7	1.0	0.45	4.0	●
2005 005 015	0.006-0.010	0.5	0.05	45	0.7	1.5	0.45	4.0	●
2005 005 025	0.006-0.009	0.5	0.05	45	0.7	2.5	0.45	4.0	●
2005 005 030	0.006-0.009	0.5	0.05	45	0.7	3.0	0.45	4.0	●
2005 005 040	0.006-0.008	0.5	0.05	45	0.7	4.0	0.45	4.0	●
2006 005 020	0.008-0.013	0.6	0.05	45	0.9	2.0	0.55	4.0	●
2006 005 040	0.008-0.013	0.6	0.05	45	0.9	4.0	0.55	4.0	●
2006 005 060	0.008-0.013	0.6	0.05	45	0.9	6.0	0.55	4.0	●
2006 010 020	0.008-0.013	0.6	0.10	45	0.9	2.0	0.55	4.0	●
2006 010 040	0.008-0.013	0.6	0.10	45	0.9	4.0	0.55	4.0	●
2006 010 060	0.008-0.013	0.6	0.10	45	0.9	6.0	0.55	4.0	●
2006 020 020	0.008-0.013	0.6	0.20	45	0.9	2.0	0.55	4.0	●
2006 020 040	0.008-0.013	0.6	0.20	45	0.9	4.0	0.55	4.0	●
2006 020 060	0.008-0.013	0.6	0.20	45	0.9	6.0	0.55	4.0	●
2008 005 020	0.007-0.015	0.8	0.05	45	1.2	2.0	0.75	4.0	●
2008 005 040	0.007-0.015	0.8	0.05	45	1.2	4.0	0.75	4.0	●
2008 005 060	0.007-0.015	0.8	0.05	45	1.2	6.0	0.75	4.0	●
2008 005 080	0.007-0.013	0.8	0.05	45	1.2	8.0	0.73	4.0	●
2008 010 020	0.007-0.015	0.8	0.10	45	1.2	2.0	0.75	4.0	●
2008 010 040	0.007-0.015	0.8	0.10	45	1.2	4.0	0.75	4.0	●
2008 010 060	0.007-0.015	0.8	0.10	45	1.2	6.0	0.75	4.0	●
2008 010 080	0.007-0.013	0.8	0.10	45	1.2	8.0	0.73	4.0	●
2008 020 020	0.007-0.015	0.8	0.20	45	1.2	2.0	0.75	4.0	●
2008 020 040	0.007-0.015	0.8	0.20	45	1.2	4.0	0.75	4.0	●
2008 020 060	0.007-0.015	0.8	0.20	45	1.2	6.0	0.75	4.0	●
2008 020 080	0.007-0.013	0.8	0.20	45	1.2	8.0	0.73	4.0	●

● Standard items

HSR 2

2 flute long neck corner radius

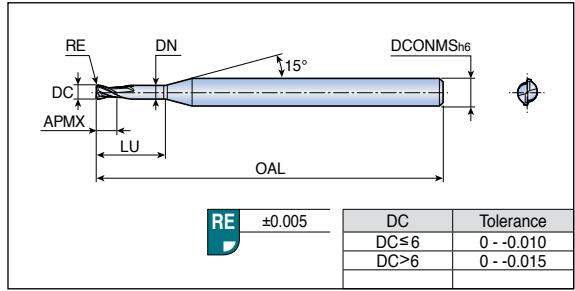


Designation	Feed (mm/tooth)	Dimension (mm)							Grade
		DC	RE	OAL	APMX	LU	DN	DCONMS	
HSR 2010 005 030	0.009-0.020	1.0	0.05	50	2.0	3	0.97	4.0	●
2010 005 040	0.009-0.020	1.0	0.05	50	2.0	4	0.97	4.0	●
2010 005 060	0.009-0.018	1.0	0.05	50	2.0	6	0.97	4.0	●
2010 005 080	0.009-0.018	1.0	0.05	50	2.0	8	0.95	4.0	●
2010 005 100	0.009-0.016	1.0	0.05	50	2.0	10	0.95	4.0	●
2010 010 030	0.009-0.020	1.0	0.10	50	2.0	3	0.97	4.0	●
2010 010 040	0.009-0.020	1.0	0.10	50	2.0	4	0.97	4.0	●
2010 010 060	0.009-0.018	1.0	0.10	50	2.0	6	0.97	4.0	●
2010 010 080	0.009-0.018	1.0	0.10	50	2.0	8	0.95	4.0	●
2010 010 100	0.009-0.016	1.0	0.10	50	2.0	10	0.95	4.0	●
2010 020 030	0.009-0.020	1.0	0.20	50	2.0	3	0.97	4.0	●
2010 020 040	0.009-0.020	1.0	0.20	50	2.0	4	0.97	4.0	●
2010 020 060	0.009-0.018	1.0	0.20	50	2.0	6	0.97	4.0	●
2010 020 080	0.009-0.018	1.0	0.20	50	2.0	8	0.95	4.0	●
2010 020 100	0.009-0.016	1.0	0.20	50	2.0	10	0.95	4.0	●
2010 030 030	0.009-0.020	1.0	0.30	50	2.0	3	0.97	4.0	●
2010 030 040	0.009-0.020	1.0	0.30	50	2.0	4	0.97	4.0	●
2010 030 060	0.009-0.018	1.0	0.30	50	2.0	6	0.97	4.0	●
2010 030 080	0.009-0.018	1.0	0.30	50	2.0	8	0.95	4.0	●
2010 030 100	0.009-0.016	1.0	0.30	50	2.0	10	0.95	4.0	●
2012 010 040	0.010-0.020	1.2	0.10	50	2.2	4	1.17	4.0	●
2012 010 060	0.010-0.020	1.2	0.10	50	2.2	6	1.17	4.0	●
2012 010 080	0.010-0.020	1.2	0.10	50	2.2	8	1.15	4.0	●
2012 010 100	0.010-0.019	1.2	0.10	50	2.2	10	1.15	4.0	●
2012 020 040	0.010-0.020	1.2	0.20	50	2.2	4	1.17	4.0	●
2012 020 060	0.010-0.020	1.2	0.20	50	2.2	6	1.17	4.0	●
2012 020 080	0.010-0.020	1.2	0.20	50	2.2	8	1.15	4.0	●
2012 020 100	0.010-0.019	1.2	0.20	50	2.2	10	1.15	4.0	●
2012 030 040	0.010-0.020	1.2	0.30	50	2.2	4	1.17	4.0	●
2012 030 060	0.010-0.020	1.2	0.30	50	2.2	6	1.17	4.0	●
2012 030 080	0.010-0.020	1.2	0.30	50	2.2	8	1.15	4.0	●
2012 030 100	0.010-0.019	1.2	0.30	50	2.2	10	1.15	4.0	●

●: Standard items

HARDMILL • RHINOSOLID

HSR 2

2 flute long neck corner radius


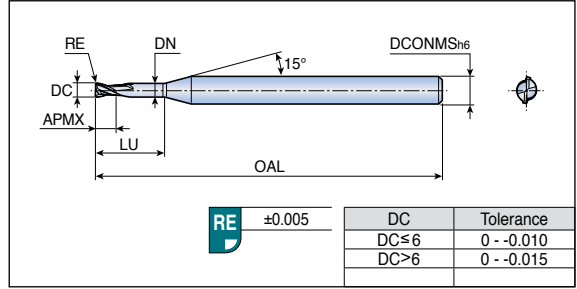


Designation	Feed (mm/tooth)	Dimension (mm)							Grade
		DC	RE	OAL	APMX	LU	DN	DCONMS	
HSR 2015 005 060	0.015-0.025	1.5	0.05	50	2.5	6	1.47	4.0	●
2015 005 080	0.015-0.025	1.5	0.05	50	2.5	8	1.45	4.0	●
2015 005 100	0.015-0.025	1.5	0.05	50	2.5	10	1.45	4.0	●
2015 005 120	0.013-0.025	1.5	0.05	50	2.5	12	1.43	4.0	●
2015 010 040	0.015-0.025	1.5	0.10	50	2.5	4	1.47	4.0	●
2015 010 060	0.015-0.025	1.5	0.10	50	2.5	6	1.47	4.0	●
2015 010 080	0.015-0.025	1.5	0.10	50	2.5	8	1.45	4.0	●
2015 010 100	0.015-0.025	1.5	0.10	50	2.5	10	1.45	4.0	●
2015 010 120	0.013-0.025	1.5	0.10	50	2.5	12	1.43	4.0	●
2015 020 040	0.015-0.025	1.5	0.20	50	2.5	4	1.47	4.0	●
2015 020 060	0.015-0.025	1.5	0.20	50	2.5	6	1.47	4.0	●
2015 020 080	0.015-0.025	1.5	0.20	50	2.5	8	1.45	4.0	●
2015 020 100	0.015-0.025	1.5	0.20	50	2.5	10	1.45	4.0	●
2015 020 120	0.013-0.025	1.5	0.20	50	2.5	12	1.43	4.0	●
2015 030 040	0.015-0.025	1.5	0.30	50	2.5	4	1.47	4.0	●
2015 030 060	0.015-0.025	1.5	0.30	50	2.5	6	1.47	4.0	●
2015 030 080	0.015-0.025	1.5	0.30	50	2.5	8	1.45	4.0	●
2015 030 100	0.015-0.025	1.5	0.30	50	2.5	10	1.45	4.0	●
2015 030 120	0.013-0.025	1.5	0.30	50	2.5	12	1.43	4.0	●
2015 050 040	0.015-0.025	1.5	0.50	50	2.5	4	1.47	4.0	●
2015 050 060	0.015-0.025	1.5	0.50	50	2.5	6	1.47	4.0	●
2015 050 080	0.015-0.025	1.5	0.50	50	2.5	8	1.45	4.0	●
2015 050 100	0.015-0.025	1.5	0.50	50	2.5	10	1.45	4.0	●
2015 050 120	0.013-0.025	1.5	0.50	50	2.5	12	1.43	4.0	●
2020 010 060	0.018-0.040	2.0	0.10	50	3.0	6	1.95	4.0	●
2020 010 080	0.018-0.040	2.0	0.10	50	3.0	8	1.95	4.0	●
2020 010 100	0.018-0.040	2.0	0.10	50	3.0	10	1.95	4.0	●
2020 010 120	0.016-0.025	2.0	0.10	50	3.0	12	1.93	4.0	●
2020 010 160	0.015-0.022	2.0	0.10	50	3.0	16	1.91	4.0	●
2020 010 200	0.013-0.019	2.0	0.10	50	3.0	20	1.91	4.0	●

● Standard items

HSR 2

2 flute long neck corner radius

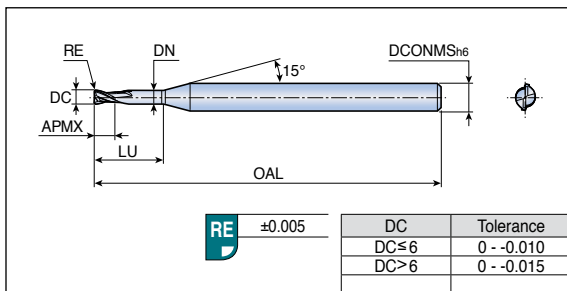


Designation	Feed (mm/tooth)	Dimension (mm)							Grade
		DC	RE	OAL	APMX	LU	DN	DCONMS	
HSR 2020 020 060	0.018-0.040	2.0	0.2	50	3.0	6	1.95	4.0	●
2020 020 080	0.018-0.040	2.0	0.2	50	3.0	8	1.95	4.0	●
2020 020 100	0.018-0.040	2.0	0.2	50	3.0	10	1.95	4.0	●
2020 020 120	0.016-0.025	2.0	0.2	50	3.0	12	1.93	4.0	●
2020 020 160	0.015-0.022	2.0	0.2	50	3.0	16	1.91	4.0	●
2020 020 200	0.013-0.019	2.0	0.2	50	3.0	20	1.91	4.0	●
2020 030 060	0.018-0.040	2.0	0.3	50	3.0	6	1.95	4.0	●
2020 030 080	0.018-0.040	2.0	0.3	50	3.0	8	1.95	4.0	●
2020 030 100	0.018-0.040	2.0	0.3	50	3.0	10	1.95	4.0	●
2020 030 120	0.016-0.025	2.0	0.3	50	3.0	12	1.93	4.0	●
2020 030 160	0.015-0.022	2.0	0.3	50	3.0	16	1.91	4.0	●
2020 030 200	0.013-0.019	2.0	0.3	50	3.0	20	1.91	4.0	●
2020 050 060	0.018-0.040	2.0	0.5	50	3.0	6	1.95	4.0	●
2020 050 080	0.018-0.040	2.0	0.5	50	3.0	8	1.95	4.0	●
2020 050 100	0.018-0.040	2.0	0.5	50	3.0	10	1.95	4.0	●
2020 050 120	0.016-0.025	2.0	0.5	50	3.0	12	1.93	4.0	●
2020 050 160	0.015-0.022	2.0	0.5	50	3.0	16	1.91	4.0	●
2020 050 200	0.013-0.019	2.0	0.5	50	3.0	20	1.91	4.0	●
2025 020 080	0.019-0.045	2.5	0.2	55	3.5	8	2.4	4.0	●
2025 020 100	0.019-0.045	2.5	0.2	55	3.5	10	2.4	4.0	●
2025 020 120	0.017-0.040	2.5	0.2	55	3.5	12	2.4	4.0	●
2025 020 160	0.015-0.030	2.5	0.2	55	3.5	16	2.4	4.0	●
2025 030 080	0.019-0.045	2.5	0.3	55	3.5	8	2.4	4.0	●
2025 030 100	0.019-0.045	2.5	0.3	55	3.5	10	2.4	4.0	●
2025 030 120	0.017-0.040	2.5	0.3	55	3.5	12	2.4	4.0	●
2025 030 160	0.015-0.030	2.5	0.3	55	3.5	16	2.4	4.0	●
2025 050 080	0.019-0.045	2.5	0.5	55	3.5	8	2.4	4.0	●
2025 050 100	0.019-0.045	2.5	0.5	55	3.5	10	2.4	4.0	●
2025 050 120	0.017-0.040	2.5	0.5	55	3.5	12	2.4	4.0	●
2025 050 160	0.015-0.030	2.5	0.5	55	3.5	16	2.4	4.0	●

●: Standard items

HARDMILL • RHINOSOLID

HSR 2

2 flute long neck corner radius

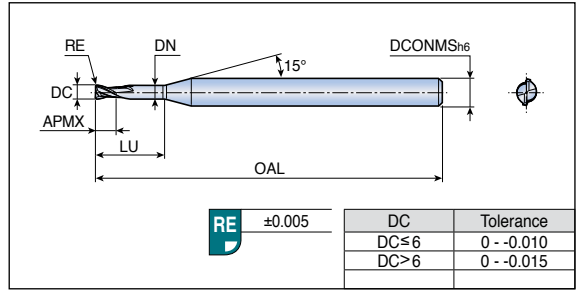


Designation	Feed (mm/tooth)	Dimension (mm)							Grade
		DC	RE	OAL	APMX	LU	DN	DCONMS	
HSR 2030 010 080	0.021-0.060	3.0	0.1	55	4.5	8	2.85	6.0	●
2030 010 100	0.021-0.060	3.0	0.1	55	4.5	10	2.85	6.0	●
2030 010 120	0.018-0.050	3.0	0.1	55	4.5	12	2.85	6.0	●
2030 010 160	0.018-0.045	3.0	0.1	55	4.5	16	2.85	6.0	●
2030 010 200	0.015-0.040	3.0	0.1	60	4.5	20	2.85	6.0	●
2030 010 250	0.015-0.040	3.0	0.1	60	4.5	25	2.85	6.0	●
2030 020 080	0.021-0.060	3.0	0.2	55	4.5	8	2.85	6.0	●
2030 020 100	0.021-0.060	3.0	0.2	55	4.5	10	2.85	6.0	●
2030 020 120	0.018-0.050	3.0	0.2	55	4.5	12	2.85	6.0	●
2030 020 160	0.018-0.045	3.0	0.2	55	4.5	16	2.85	6.0	●
2030 020 200	0.015-0.040	3.0	0.2	60	4.5	20	2.85	6.0	●
2030 020 250	0.015-0.040	3.0	0.2	60	4.5	25	2.85	6.0	●
2030 030 080	0.021-0.060	3.0	0.3	55	4.5	8	2.85	6.0	●
2030 030 100	0.021-0.060	3.0	0.3	55	4.5	10	2.85	6.0	●
2030 030 120	0.018-0.050	3.0	0.3	55	4.5	12	2.85	6.0	●
2030 030 160	0.018-0.045	3.0	0.3	55	4.5	16	2.85	6.0	●
2030 030 200	0.015-0.040	3.0	0.3	60	4.5	20	2.85	6.0	●
2030 030 250	0.015-0.040	3.0	0.3	60	4.5	25	2.85	6.0	●
2030 050 080	0.021-0.060	3.0	0.5	55	4.5	8	2.85	6.0	●
2030 050 100	0.021-0.060	3.0	0.5	55	4.5	10	2.85	6.0	●
2030 050 120	0.018-0.050	3.0	0.5	55	4.5	12	2.85	6.0	●
2030 050 160	0.018-0.045	3.0	0.5	55	4.5	16	2.85	6.0	●
2030 050 200	0.015-0.040	3.0	0.5	60	4.5	20	2.85	6.0	●
2030 050 250	0.015-0.040	3.0	0.5	60	4.5	25	2.85	6.0	●
2030 100 080	0.021-0.060	3.0	1.0	55	4.5	8	2.85	6.0	●
2030 100 100	0.021-0.060	3.0	1.0	55	4.5	10	2.85	6.0	●
2030 100 120	0.018-0.050	3.0	1.0	55	4.5	12	2.85	6.0	●
2030 100 160	0.018-0.045	3.0	1.0	55	4.5	16	2.85	6.0	●
2030 100 200	0.015-0.040	3.0	1.0	60	4.5	20	2.85	6.0	●

● Standard items

HSR 2...M

2 flute medium corner radius

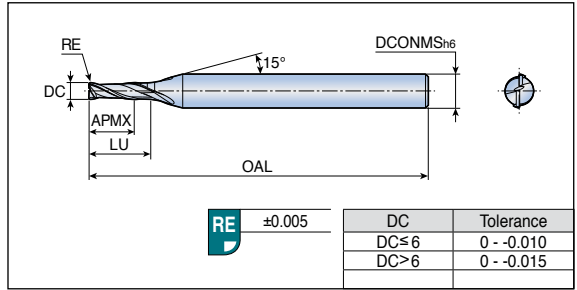


Designation	Feed (mm/tooth)	Dimension (mm)						Grade
		DC	RE	OAL	APMX	LU	DCONMS	
HSR 2003M 002	0.006-0.010	0.3	0.02	45	0.6	0.9	4.0	●
2003M 005	0.006-0.010	0.3	0.05	45	0.6	0.9	4.0	●
2004M 005	0.006-0.010	0.4	0.05	45	0.8	1.1	4.0	●
2004M 010	0.006-0.010	0.4	0.10	45	0.8	1.1	4.0	●
2005M 005	0.006-0.010	0.5	0.05	45	1.0	1.3	4.0	●
2005M 010	0.006-0.010	0.5	0.10	45	1.0	1.3	4.0	●
2006M 005	0.008-0.013	0.6	0.05	45	1.2	1.5	4.0	●
2006M 010	0.008-0.013	0.6	0.10	45	1.2	1.5	4.0	●
2006M 020	0.008-0.013	0.6	0.20	45	1.2	1.5	4.0	●
2008M 005	0.007-0.015	0.8	0.05	45	1.6	2	4.0	●
2008M 010	0.007-0.015	0.8	0.10	45	1.6	2	4.0	●
2008M 020	0.007-0.015	0.8	0.20	45	1.6	2	4.0	●
2010M 005	0.009-0.020	1.0	0.05	50	2.0	3.5	6.0	●
2010M 010	0.009-0.020	1.0	0.10	50	2.0	3.5	6.0	●
2010M 020	0.009-0.020	1.0	0.20	50	2.0	3.5	6.0	●
2010M 030	0.009-0.020	1.0	0.30	50	2.0	3.5	6.0	●
2012M 005	0.010-0.020	1.2	0.05	50	2.5	4	6.0	●
2012M 010	0.010-0.020	1.2	0.10	50	2.5	4	6.0	●
2012M 020	0.010-0.020	1.2	0.20	50	2.5	4	6.0	●
2012M 030	0.010-0.020	1.2	0.30	50	2.5	4	6.0	●
2015M 005	0.015-0.025	1.5	0.05	50	3.0	5	6.0	●
2015M 010	0.015-0.025	1.5	0.10	50	3.0	5	6.0	●
2015M 020	0.015-0.025	1.5	0.20	50	3.0	5	6.0	●
2015M 030	0.015-0.025	1.5	0.30	50	3.0	5	6.0	●
2020M 010	0.018-0.040	2.0	0.10	50	5.0	7	6.0	●
2020M 020	0.018-0.040	2.0	0.20	50	5.0	7	6.0	●
2020M 030	0.018-0.040	2.0	0.30	50	5.0	7	6.0	●
2020M 050	0.018-0.040	2.0	0.50	50	5.0	7	6.0	●
2025M 010	0.019-0.045	2.5	0.10	60	7.0	9	6.0	●
2025M 020	0.019-0.045	2.5	0.20	60	7.0	9	6.0	●
2025M 030	0.019-0.045	2.5	0.30	60	7.0	9	6.0	●
2025M 050	0.019-0.045	2.5	0.50	60	7.0	9	6.0	●

●: Standard items

HARDMILL • RHINOSOLID

HSR 4

4 flute long neck corner radius

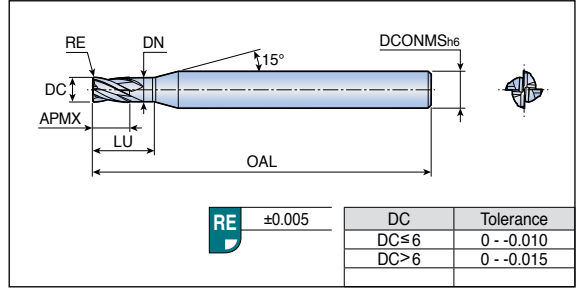

Designation	Feed (mm/tooth)	Dimension (mm)							Grade
		DC	RE	OAL	APMX	LU	DN	DCONMS	
HSR 4010 010 030	0.009-0.020	1.0	0.1	50	2.0	3	0.97	4.0	●
4010 010 040	0.009-0.020	1.0	0.1	50	2.0	4	0.97	4.0	●
4010 010 060	0.009-0.018	1.0	0.1	50	2.0	6	0.97	4.0	●
4010 020 030	0.009-0.020	1.0	0.2	50	2.0	3	0.97	4.0	●
4010 020 040	0.009-0.020	1.0	0.2	50	2.0	4	0.97	4.0	●
4010 020 060	0.009-0.018	1.0	0.2	50	2.0	6	0.97	4.0	●
4010 030 030	0.009-0.020	1.0	0.3	50	2.0	3	0.97	4.0	●
4010 030 040	0.009-0.020	1.0	0.3	50	2.0	4	0.97	4.0	●
4010 030 060	0.009-0.018	1.0	0.3	50	2.0	6	0.97	4.0	●
4015 010 040	0.015-0.025	1.5	0.1	50	2.5	4	1.45	4.0	●
4015 010 060	0.015-0.025	1.5	0.1	50	2.5	6	1.45	4.0	●
4015 020 040	0.015-0.025	1.5	0.2	50	2.5	4	1.45	4.0	●
4015 020 060	0.015-0.025	1.5	0.2	50	2.5	6	1.45	4.0	●
4015 030 040	0.015-0.025	1.5	0.3	50	2.5	4	1.45	4.0	●
4015 030 060	0.015-0.025	1.5	0.3	50	2.5	6	1.45	4.0	●
4020 010 060	0.018-0.040	2.0	0.1	50	3.0	6	1.95	4.0	●
4020 010 080	0.018-0.040	2.0	0.1	50	3.0	8	1.95	4.0	●
4020 010 100	0.018-0.040	2.0	0.1	50	3.0	10	1.95	4.0	●
4020 010 120	0.016-0.025	2.0	0.1	50	3.0	12	1.95	4.0	●
4020 010 160	0.015-0.022	2.0	0.1	50	3.0	16	1.95	4.0	●
4020 020 060	0.018-0.040	2.0	0.2	50	3.0	6	1.95	4.0	●
4020 020 080	0.018-0.040	2.0	0.2	50	3.0	8	1.95	4.0	●
4020 020 100	0.018-0.040	2.0	0.2	50	3.0	10	1.95	4.0	●
4020 020 120	0.016-0.025	2.0	0.2	50	3.0	12	1.95	4.0	●
4020 020 160	0.015-0.022	2.0	0.2	50	3.0	16	1.95	4.0	●
4020 030 060	0.018-0.040	2.0	0.3	50	3.0	6	1.95	4.0	●
4020 030 080	0.018-0.040	2.0	0.3	50	3.0	8	1.95	4.0	●
4020 030 100	0.018-0.040	2.0	0.3	50	3.0	10	1.95	4.0	●
4020 030 120	0.016-0.025	2.0	0.3	50	3.0	12	1.95	4.0	●
4020 030 160	0.015-0.022	2.0	0.3	50	3.0	16	1.95	4.0	●
4020 050 060	0.018-0.040	2.0	0.5	50	3.0	6	1.95	4.0	●
4020 050 080	0.018-0.040	2.0	0.5	50	3.0	8	1.95	4.0	●
4020 050 100	0.018-0.040	2.0	0.5	50	3.0	10	1.95	4.0	●
4020 050 120	0.016-0.025	2.0	0.5	50	3.0	12	1.95	4.0	●
4020 050 160	0.015-0.022	2.0	0.5	50	3.0	16	1.95	4.0	●


●: Standard items

HSR 6

6 flute long neck corner radius



• Finishing

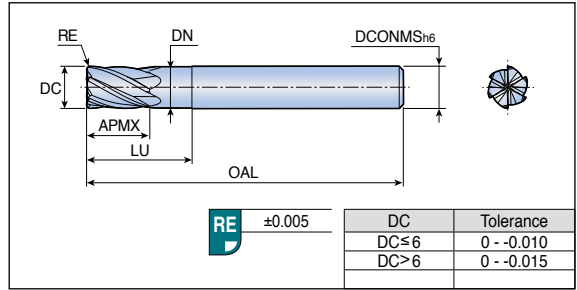

Designation	Feed (mm/tooth)	Dimension (mm)							Grade
		DC	RE	OAL	APMX	LU	DN	DCONMS	
HSR 6060 050 150	0.038-0.050	6.0	0.5	60	9	15	5.8	6.0	●
6060 100 150	0.038-0.050	6.0	1.0	60	9	15	5.8	6.0	●
6080 050 200	0.045-0.060	8.0	0.5	70	12	20	7.8	8.0	●
6080 100 200	0.045-0.060	8.0	1.0	70	12	20	7.8	8.0	●
6100 050 250	0.045-0.060	10.0	0.5	75	15	25	9.8	10.0	●
6100 100 250	0.045-0.060	10.0	1.0	75	15	25	9.8	10.0	●
6120 050 300	0.053-0.070	12.0	0.5	85	18	30	11.6	12.0	●
6120 100 300	0.053-0.070	12.0	1.0	85	18	30	11.6	12.0	●



● Standard items

HSR 6...M

6 flute medium corner radius



• Finishing

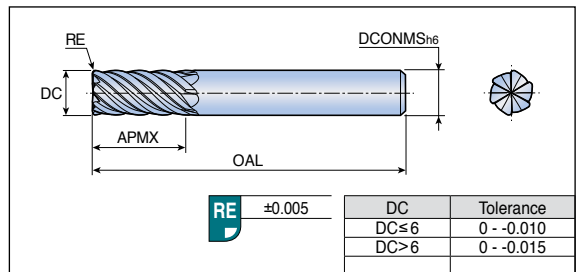

Designation	Feed (mm/tooth)	Dimension (mm)					Grade
		DC	RE	OAL	APMX	DCONMS	
HSR 6060M 050	0.038-0.050	6.0	0.5	60	15	6.0	●
6060M 100	0.038-0.050	6.0	1.0	60	15	6.0	●
6080M 050	0.045-0.060	8.0	0.5	65	20	8.0	●
6080M 100	0.045-0.060	8.0	1.0	65	20	8.0	●
6100M 050	0.045-0.060	10.0	0.5	70	22	10.0	●
6100M 100	0.045-0.060	10.0	1.0	70	22	10.0	●
6100M 150	0.045-0.060	10.0	1.5	70	22	10.0	●
6120M 050	0.053-0.070	12.0	0.5	80	26	12.0	●
6120M 100	0.053-0.070	12.0	1.0	80	26	12.0	●
6120M 150	0.053-0.070	12.0	1.5	80	26	12.0	●

● Standard items

HARDMILL

Tool CutZZ

Your Knowledge Machining Link!



Scan me!



ANDROID APP ON
Google play

Scan me!



Download on the
App Store